


NXL SINGLE HEAD NOTCHER

The Go Fast NXL Single Head Notcher is a compact, heavy duty, and SAFE machine for your notching needs. Notch new or recycled material or even 6" wide cants.

SAFE: A dual hand control check valve requires that the operator has both hands on the push buttons while the table is moving through the cutter. The cutter head is well guarded and never exposed to the operator.

DOUBLE CLAMP: In addition to a front clamp, a top clamp is included to help hold the material down while it is being notched. Unfortunately many other notchers do not include this feature which results in you replacing more cutter tips and spending more money.

RECYLED MATERIAL: Need a notcher that was actually built for recycled material? With 3/8" thick steel framing and a 3/8" thick steel table top, the NXL notcher will hold-up against the toughest of jobs!

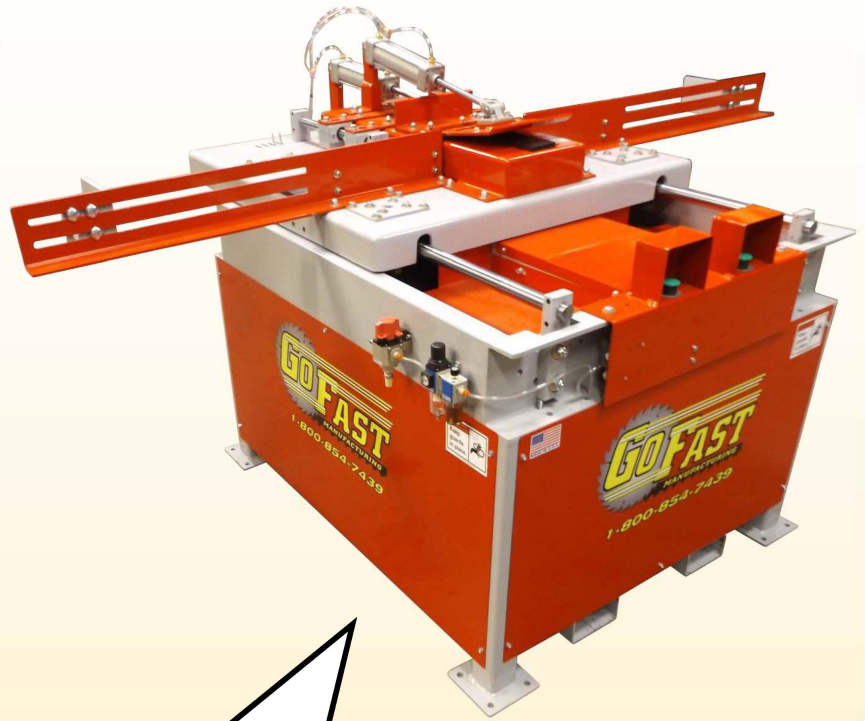

"We feel it's a safe machine and well designed. The best part is that what used to take us 12-14 hrs on a radial arm saw, this machine can do the same job in about 4 hrs. Great job in the designing and building this machine for us."

-Skid Rite LLC
Greene, NY

STANDARD FEATURES


CUTTER HEAD IS NEVER EXPOSED



TABLE MOVES W/ DUAL AIR RAMS AND LINEAR BEARINGS



DOUBLE CLAMP SYSTEM

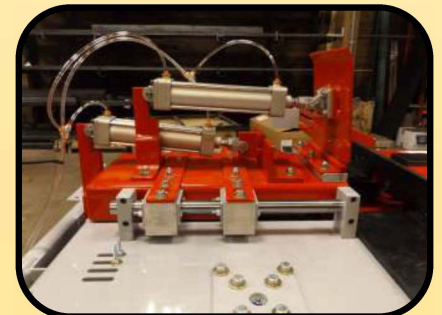

FEATURES & SPECS

MACHINE SPECS

Dimensions

- Length: 60"
- Width: 90"
- Height: 50"
- Table Height: 37"
- Approx. 2000 LBS

Power

- 20 HP Electric Motor: 208/230/480/3/60 TEFC
- Completely pre-wired motor starter with start/stop buttons and circuit overload protection

OPTIONS

Machine Options

- Cutter Teeth for Recycled Material
- Longer and Taller Capacities
- Different Notch Widths
- Stand Alone Control Station
- Stringer Stacking Racks
- Caster Feet

MACHINE SPECS

Specifications

- Arbor and Bearing Size: 2"
- Table Linear Bearings Size: 1-1/4"
- Clamp Linear Bearings Size: 1"
- Hardened Linear Bearing Shafts
- 3/8" Thick Steel Table Top
- 3/8" Thick Steel Framing
- 8" Dust Ports: 5,000 CFM Recommended

Air System

- Operating Pressure: 100 PSI, 20CFM
- Air Cylinder Bore Sizes: 2" (x4 Cylinders)
- Air System Includes: Dual Hand Safety Controls, Lockout Valve, Regulator, Pressure Relief, Reservoir, Table Speed Controllers, and Mechanical Valves

Capacities

- Material Width: up to 6"
- Material Height: 4" (Standard)
- Material Length: up to 60" (Standard)
- Standard Notch: up to 9" Wide
- Adjustable Notch: up to 2-1/2" Tall

POPULAR OPTIONS

CUTTER TEETH FOR NEW OR RECYCLED WOOD



LONGER MATERIAL EXTENSION



CUSTOM NOTCH LENGTH

